

Pro-Val SuperSoft

Powder Free Nitrile Examination Gloves



FEATURES AND BENEFITS

- Nitrile
- Medical / Examination Grade
- Powder and Latex Free
- Super Soft and extremely comfortable
- Ultra thin, provides increased touch and feel
- Textured fingertips for good grip
- Vinyl, BPA, phthalate and MBT Free
- Broad range of chemical resistance, particularly petroleum based chemicals.
- Beaded Cuff
- Ambidextrous Design
- Single Use Only, Non Sterile





SuperSoft

PRODUCT TYPE

Examination Grade Glove

MATERIAL

Powder Free Nitrile

SIZES

Small, Medium, Large, XL

COLOURS

Blue

STANDARDS & CERTIFICATIONS

Certified under
HACCP Food Safety
Certification
Programme



Gloves are tested to and
comply with ISO 14971:2007

Gloves are tested to and
comply with ASTM D6319

Gloves are tested to and
comply with EN455

SuperSoft is entered in the ARTG
ARTG 352756

Meets International Standard for
Medical Examination Gloves



RCR International Pty Ltd

ABN: 21 089 270 360

PO Box 148, Braeside VIC 3195


Tel: (03) 9558 2020 Fax: (03) 9558 3030

Email: service@rcr.com.au

www.rcr.com.au www.pro-val.com.au

Pro-Val SuperSoft are our most cost effective Nitrile Examination glove. They are incredibly soft, comfortable and dextrous.

Blue in colour, they are easily recognised in food processing and handling areas and can also be used in medical and laboratory applications.

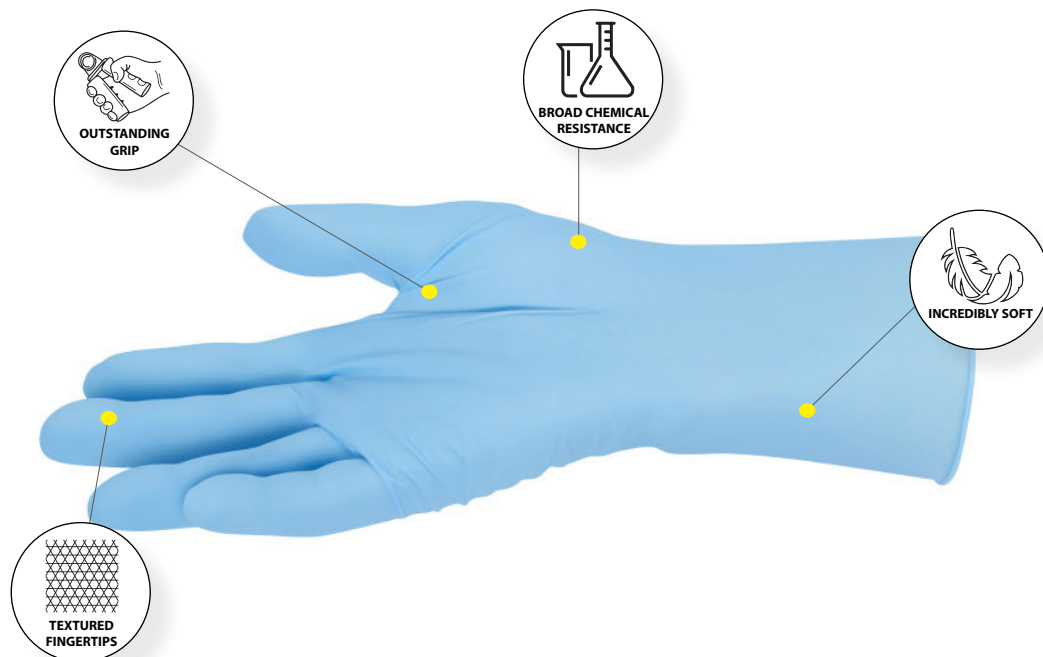

STORAGE

Store out of direct sunlight in dry conditions between 10 °c and 30 °c.

SHELF LIFE

3 Years from Date of Manufacture when stored in compliance with stated conditions.

STANDARD PACKAGING

100 pieces per Inner, 10 Innerns per Carton

TOTAL 1000 Gloves per Carton

WASHING INSTRUCTIONS

Do not launder or iron

RECOMMENDED APPLICATIONS



PRODUCT DIMENSIONS

SIZE	PRODUCT CODE	BARCODE	LENGTH (mm)	THICKNESS FINGER SINGLE WALL (mm)	THICKNESS PALM SINGLE WALL (min/max)	THICKNESS CUFF SINGLE WALL (min/max)
S	41130	9311059411305	240mm	0.06mm	0.05/0.07mm	0.04/0.06mm
M	41131	9311059411312	240mm	0.06mm	0.05/0.07mm	0.04/0.06mm
L	41132	9311059411329	240mm	0.06mm	0.05/0.07mm	0.04/0.06mm
XL	41133	9311059411336	240mm	0.06mm	0.05/0.07mm	0.04/0.06mm